



PENTHOUSE TSC™ BLIND

Patent Pending

Instruction Manual




**Be sure to follow these guidelines for using your Penthouse TSC™
READ ALL INSTRUCTIONS and WARNINGS FIRST**

Any questions or confusion regarding the use of this product contact our Customer Service Department at Ameristep® (810) 686-4035 before using.


COMPONENTS

PENTHOUSE TSC™ BLIND

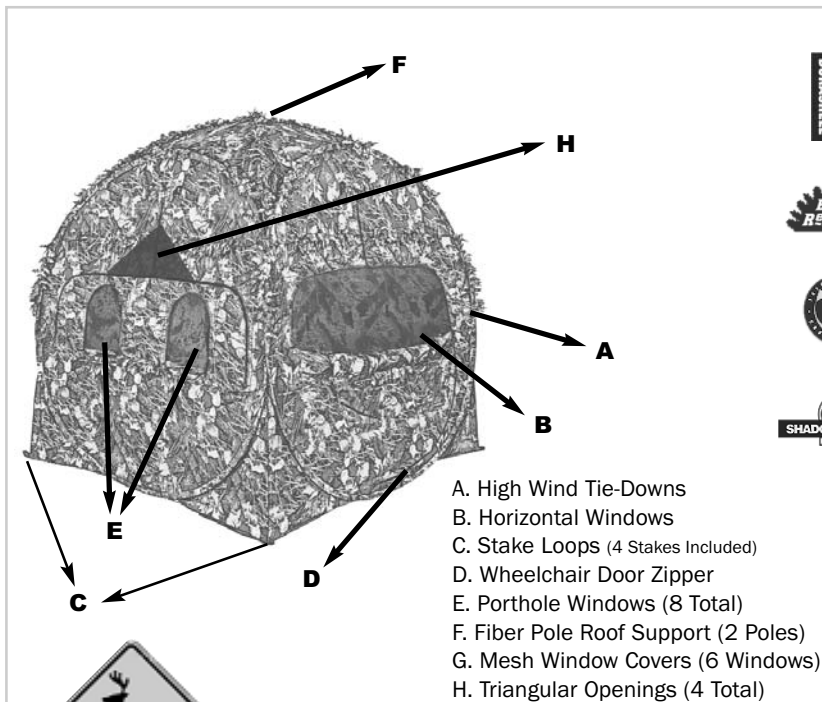

PARTS LIST:

- 1 Penthouse TSC™ Blind (78" square x 90" Tall)
- 12 windows/ 8 Portholes/ 4 Triangular Openings
- Floor-to-Floor Fiber Poles
- Bow Holder
- Gear Pockets
- Shoot-Through Mesh
- TSC Window Kit (Kit Included)
- 48" x 60" Wheelchair Opening
- 1 Camo Back Pack w/padded shoulder straps

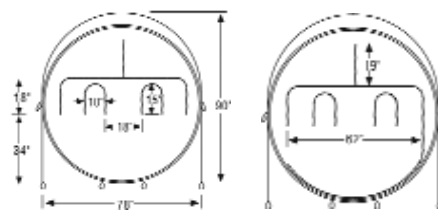

THINK SAFETY !

- NEVER USE A HEATER IN YOUR TSC BLIND - UNVENTED FUMES COULD CAUSE SICKNESS OR DEATH
- NEVER EXPOSE YOUR BLIND TO ANY OPEN FLAME. THIS PRODUCT IS NOT FIREPROOF.
- NEVER SHOOT THROUGH THE TSC WINDOWS WITH A FIREARM - SPARKS OR FLAMES FROM THE MUZZLE COULD IGNITE THE MATERIAL.
- NEVER SHOOT EXPANDABLE BROADHEADS THROUGH THE TSC WINDOWS - THE MESH MAY CAUSE PREMATURE OPENING OF THE BLADES. USE FIXED BLADE BROADHEADS ONLY.
- FOR BEST ARROW FLIGHT THROUGH THE TSC WINDOWS, ALIGN BROADHEAD BLADES WITH FLETCHING.
- NEVER ALLOW CHILDREN TO PLAY WITH THIS PRODUCT WITHOUT ADULT SUPERVISION.
- NEVER ALLOW THE MATERIAL TO COVER YOUR FACE. IT CAN CAUSE SUFFOCATION AND DEATH.



STORAGE & TIPS

- Store your Blind in a cool dry place
- Store your Blind free of dirt and any debris
- Never store your Blind wet or damp
- Avoid leaving your Blind outdoors for extended periods of time as it will cause unnecessary fading of the material.
- To stop any leakage, use seam sealer on all seams and silicon spray on the sidewalls.

See our full line of accessories on our website.
 Replacement Parts are also available


SET-UP

PENTHOUSE TSC™ BLIND

WARNING: The Penthouse TSC™ Blind is constructed of Spring Steel - Open with extreme caution, holding the blind away from face, body and other people.



Step 1:
Remove the pouches containing the stakes, fiber poles and TSC Windows..

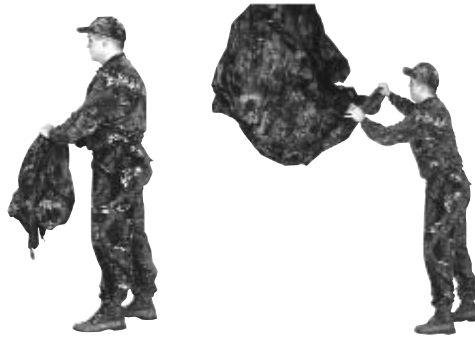



Step 2: Remove your Blind from the back pack. Holding one of the 4 ring sets of steel, let the other two pop open.



Step 3:
Once it has popped open, unfold your Penthouse TSC™ and lay it flat on the ground.




Step 4: Take hold of the corner and put your foot on the bottom section. Pull the top section up.

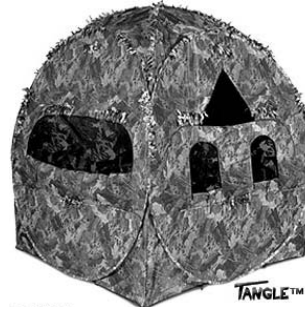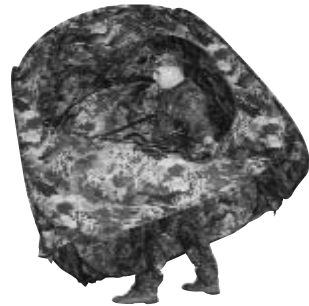

Step 5:
Lift the top of the blind over your head so you are standing on the inside when it opens. Continue to tip over your head until your Penthouse TSC™ stands upright.

Step 6:
After standing your blind upright, spread each side of your blind and stake down. High wind tie-downs are included. (if needed)

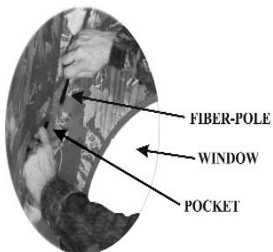

Fiber Poles:

Included are 2 fiber poles to arch the roof. Insert one end of each pole into opposite pockets inside the blind. The poles will cross at the peak of the roof. The pockets are located at the floor in all 4 corners of the blind. Fix the poles to the blind using the ties at the corners (window height) and one tie in the center of the roof.



TAKE-DOWN PENTHOUSE TSC™ BLIND

IMPORTANT:
BEFORE take-down of your Penthouse TSC™, remove all TSC Windows, fiber poles, high wind tie-downs and ground stakes. Make sure that it is **COMPLETELY DRY** and free from dirt and any debris.



Step 1: Be sure to remove the TSC windows before folding the blind. Take care not to fold or otherwise wrinkle the TSC windows as this could reduce visibility. Remove all ground stakes, tie-downs, and fiber poles.



Step 2:
Take hold of one of the corners and lay the blind on it's side.



Step 3:
Continue folding each side over the other, until the blind lays flat on the ground.



Step 4:
Stand the folded blind up, place your hands in a 10 o'clock and 2 o'clock position. Begin to push down it will begin to fold in the center. Continue pushing downward to form a "U" shape.



Step 5:
Draw your hands together upward as you continue to push downward.

Step 6:
While holding the rings tight, tuck the left ring under the right ring. Push the rings downward until they are flat.

Step 7:
Pick up your folded "disk" and slide into your back pack.



Step 8:
Pack ground stakes, and high wind tie-downs in the pouches provided. Store them with your Ameristep® Blind for your next hunting adventure.



PENTHOUSE TSC™ WINDOWS

Windows Installation Instructions




First, from the inside of the blind, unzip the window cover, allowing it to hang down within the blind. Then roll up the window cover and secure it with the loop and tie located at the base of the window. Next, unroll the TSC window and apply it to the window opening by pressing the hook and loop strips together. Start at the top of the window, then attach the sides, and finally apply the bottom of the window to the blind. Take care not to fold or otherwise wrinkle the TSC windows as this could reduce visibility. Stretch the edge taut before securing the hook and loop strips.

How the Ameristep® Total Scent Containment (TSC) System Works

The TSC System is comprised of the black ShadowGuard interior lining and the TSC window membranes. The ShadowGuard interior lining not only eliminates shadows and silhouettes, it also contains human scent within the blind. The see-through, shoot-through TSC windows also



prevent human scent from escaping to the outside, enabling hunters to remain completely concealed within the blind while still being able to see and shoot. Because the TSC windows cover the entire zippered openings on all three sides of the blind, the windows may be opened in any configuration desired without scent escaping the blind. Hunters may keep the windows wide open (A), or use only the porthole (B) for viewing and shooting.

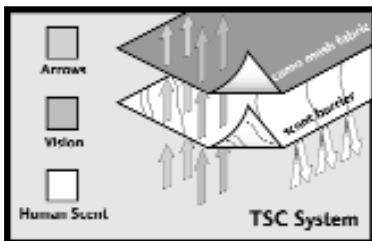

THINK SAFETY !

- NEVER USE A HEATER IN YOUR TSC BLIND - UNVENTED FUMES COULD CAUSE SICKNESS OR DEATH
- NEVER SHOOT THROUGH THE TSC WINDOWS WITH A FIREARM - SPARKS OR FLAMES FROM THE MUZZLE COULD IGNITE THE MATERIAL.
- NEVER SHOOT EXPANDABLE BROADHEADS THROUGH THE TSC WINDOWS- THE MESH MAY CAUSE PREMATURE OPENING OF THE BLADES. USE FIXED BLADE BROADHEADS ONLY.
- FOR BEST ARROW FLIGHT THROUGH THE TSC WINDOWS- ALIGN BROADHEAD BLADES WITH FLETCHING.

